

Screw Conveyor

GVH

Genç Değirmen
MILLING MACHINERY


Excellent Milling Properties...

WORKING PRINCIPLES

Screw Conveyor is used to transport products filling and discharging operations. Producing with standard construction U-type trough or optional galvanized steel, painted steel and stainless steel. Available for use all industries.



Product Data Sheet

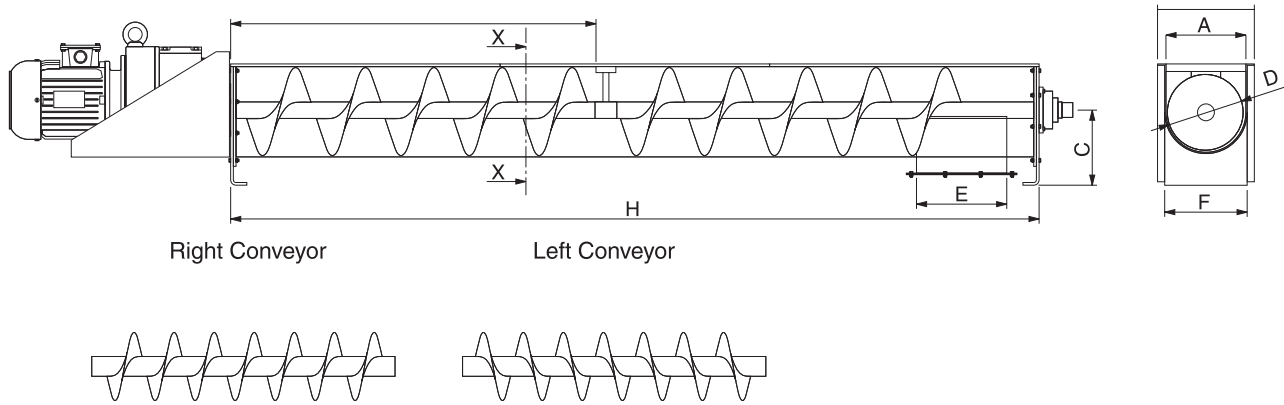

Type	Technical Features						Dimensions (mm)							
	Max Length(m)	Capacity (t/h)					Power (Kw)	A	B	C	D	E	F	G
		Wheat	Flour	Bran	Semolina	Bran								
GVH 150	20	5	4	3	3	2	0.75 - 1.5	165	255	215	150	165	165	200
GVH 165	20	7	6	5	4	3	0.75 - 2.2	195	255	230	165	195	195	200
GVH-C 165														
GVH 180	20	9	8	6	5	4	1.1 - 3	210	275	245	180	210	210	200
GVH-C 180														
GVH 200	20	12	10	8	8	5	1.5 - 4	230	290	265	200	230	230	200
GVH-C 200														
GVH-220	20	16	14	11	11	7	1.5 - 5.5	250	310	285	220	250	250	200
GVH-C 200														
GVH 250	20	24	21	17	17	11	1.5 - 7.5	280	340	315	250	280	280	200
GVH-C 250														
GVH 270	20	30	26	21	21	14	1.5 - 11	300	380	345	270	300	300	200
GVH-C 270														
GVH 300	20	42	36	30	30	19	1.5 - 15	330	410	375	300	330	330	200
GVH-C 300														
GVH 350	20	67	58	47	47	30	2.2 - 18.5	380	460	425	350	380	380	200
GVH 380	20	86	75	60	60	38	3 - 30	410	510	460	380	410	410	200
GVH 400														